

BEK KIT (BACKUP EMERGENCY KIT) WITH MAGNILUMEN PLUS BOARDS + EM DRIVER AND BATTERY

DESCRIPTION

The BEK Kit will now be your easiest and most versatile Emergency Backup kit. This kit will be a separately wired kit within the fixture, not needing to be linked to the existing driver. The kit comes in a 1 or 2 bar setup, with the customer's choice of 35K, 40K or 50K color temperatures. Mounting hardware along with whip, and test button included with green charging indicator. With the ability to be paired with any type of fixture, whether it be our LED tubes kit or even a simple fluorescent tube fixture, this kit will provide a solid 90-minute stream of light that will meet and exceed your egress needs. We offer a 5-year warranty. Don't risk light levels during an emergency, power through it with the BEK Kit!

Follow all local fire egress codes and FC requirements noted.

PRODUCT FEATURES

- **Wattages:** 15W
- **Kit Lengths:** 2' and 4'
- **Voltage Input:** 100-277V
- **Color Temperatures:** 35K, 40K, 50K
- **Charge Time:** 24 hour charge time
- **Emergency Time:** 90 minute charge
- **Warranty:** 5 years
- **Kit Includes:** Bar(s), EM driver, battery pack, harnesses, tech screws, and test button/green detector light.

Tech screws and whip for bar(s) also included.

LUMENS:

15W x 150L with diffuser = 2,250 lumens


15W x 180L without diffuser = 2,700 lumens

NOTES:

- Optional single bar kit or 2 bar kit available.
- Product may be installed in non-ZLEDLighting/Magnilumen Plus kits or drivers.


Job / Project Name	
Product Model Number	
Quantity	
Date	

**BEK
KIT**

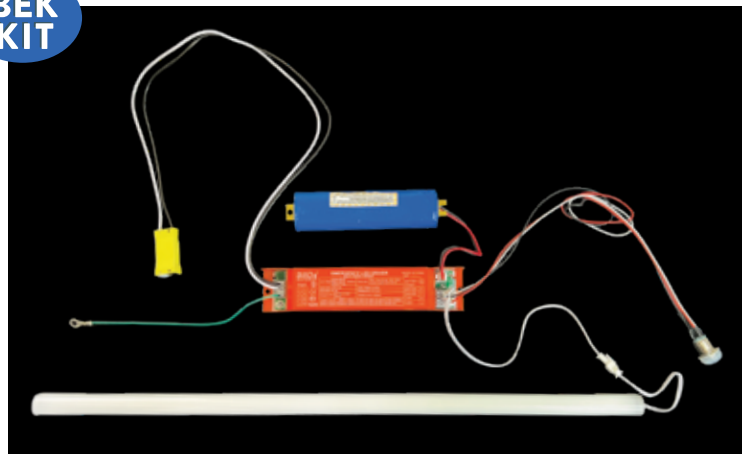


PRODUCT NUMBER	15W EMERGENCY KIT CONTAINS:
BEK12-15W-50K-2250L-PLUS	one 2 ft. Magnilumen Plus board, EM driver, battery pack, harnesses and tech screws
BEK14-15W-50K-2250L-PLUS	one 4 ft. Magnilumen Plus board, EM driver, battery pack, harnesses and tech screws
BEK22-15W-50K-2250L-PLUS	two 2 ft. Magnilumen Plus boards, EM driver, battery pack, harnesses and tech screws
BEK24-15W-50K-2250L-PLUS	two 4 ft. Magnilumen Plus board, EM driver, battery pack, harnesses and tech screws
BEK12-15W-40K-2250L-PLUS	one 2 ft. Magnilumen Plus board, EM driver, battery pack, harnesses and tech screws
BEK14-15W-40K-2250L-PLUS	one 4 ft. Magnilumen Plus board, EM driver, battery pack, harnesses and tech screws
BEK22-15W-40K-2250L-PLUS	two 2 ft. Magnilumen Plus boards, EM driver, battery pack, harnesses and tech screws
BEK24-15W-40K-2250L-PLUS	two 4 ft. Magnilumen Plus board, EM driver, battery pack, harnesses and tech screws
BEK12-15W-35K-2250L-PLUS	one 2 ft. Magnilumen Plus board, EM driver, battery pack, harnesses and tech screws
BEK14-15W-35K-2250L-PLUS	one 4 ft. Magnilumen Plus board, EM driver, battery pack, harnesses and tech screws
BEK22-15W-35K-2250L-PLUS	two 2 ft. Magnilumen Plus boards, EM driver, battery pack, harnesses and tech screws
BEK24-15W-35K-2250L-PLUS	two 4 ft. Magnilumen Plus board, EM driver, battery pack, harnesses and tech screws

OPTION A: EMERGENCY BACK-UP DRIVER WITH ONE LED BAR

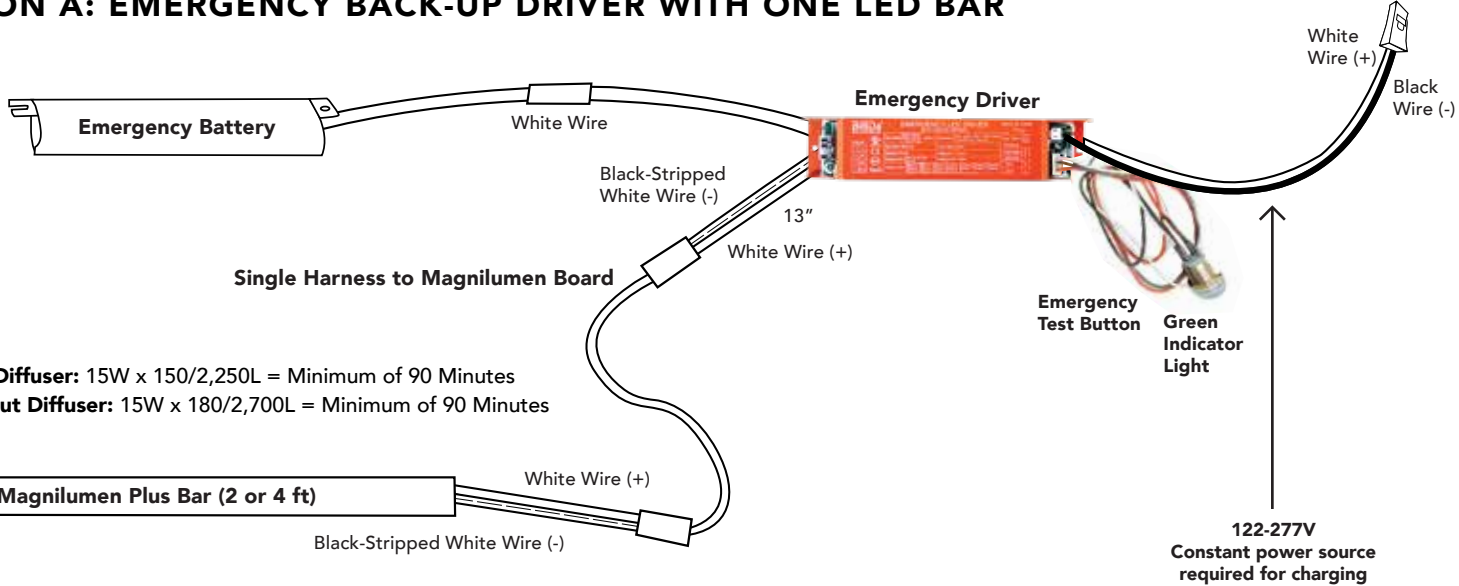

1 Bar with Diffuser: 15W x 150/2,250L = Minimum of 90 Minutes
 1 Bar without Diffuser: 15W x 180/2,700L = Minimum of 90 Minutes

OPTION B: EMERGENCY BACK-UP DRIVER WITH TWO LED BARS

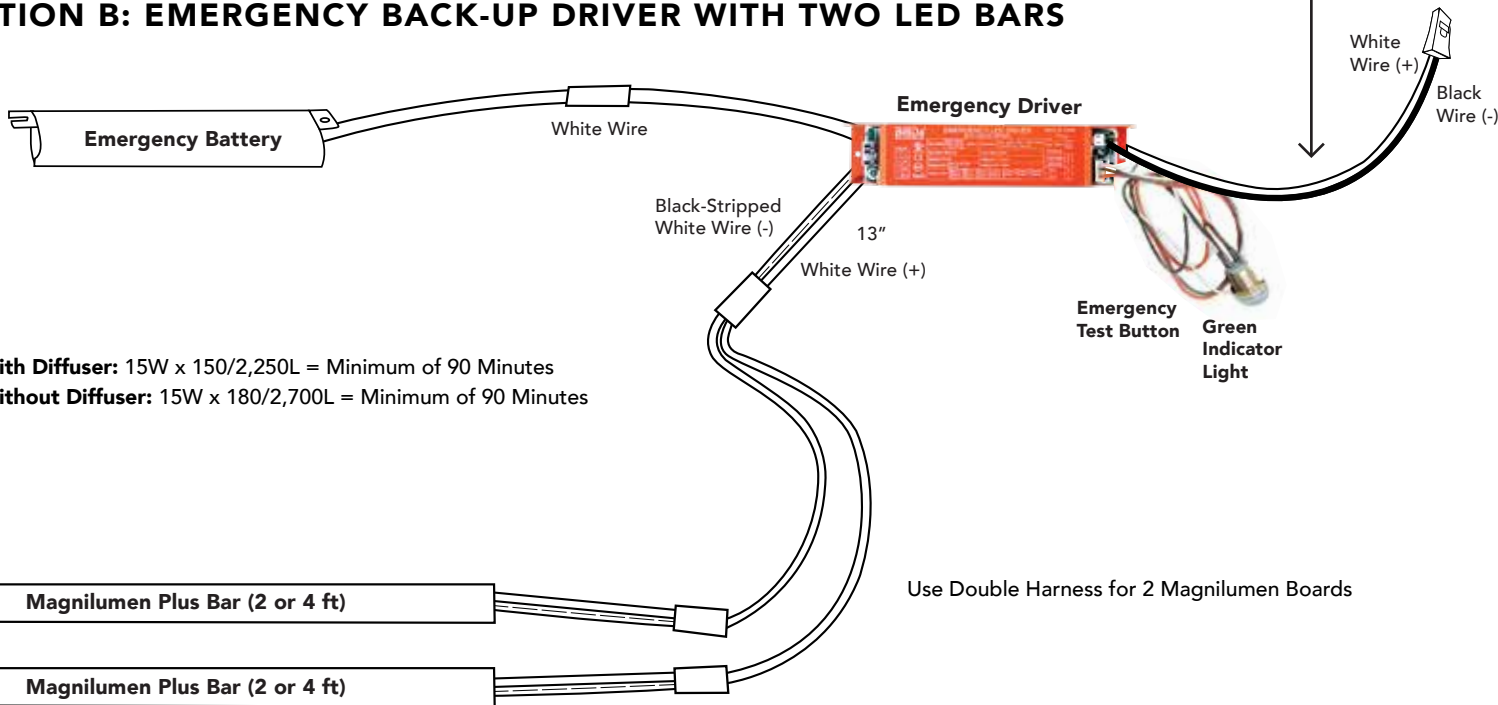

1 Bar with Diffuser: 15W x 150/2,250L = Minimum of 90 Minutes
 1 Bar without Diffuser: 15W x 180/2,700L = Minimum of 90 Minutes

*Lumens same as 1 bar.